

## SPECIFICATIONS O<sup>2</sup>DS Z-LINE SCANNER SERIES



### Options for:

- High Target temp. (1000°C), Very High Target temp. (1300°C) and Very Very High Target temp. (1500 up to 2200°C).
- RS232, RS422 or Ethernet.
- Customized versions.

MODELS	O <sup>2</sup> DS 250	O <sup>2</sup> DS 325	O <sup>2</sup> DS 500	O <sup>2</sup> DS 505	O <sup>2</sup> DS 750	O <sup>2</sup> DS 1155	O <sup>2</sup> DS 1350	O <sup>2</sup> DS 1950
<b>Measurement data:</b>								
Radial distance from mirror axis	200-300 mm	200-450 mm	250-750 mm	450-550 mm	400-1100 mm	1000-1300 mm	700-2000 mm	1500-2400
Minimum 10° scan arch	± 5°	± 5°	± 5°	± 5°	± 5°	± 5°	± 5°	± 5°
Depth of Field (X)	98 mm	248 mm	497 mm	98 mm	695 mm	295 mm	1292 mm	890 mm
Field of View close end (Y)	35 mm	35 mm	43 mm	79 mm	70 mm	175 mm	123 mm	262
Field of View far end (Y)	52 mm	78 mm	130 mm	95 mm	191 mm	226 mm	348 mm	418 mm
Maximum 50° scan arch	± 25°	± 25	± 25	± 25	± 25	± 25	± 25	± 25
Depth of Field (X)	72 mm	207 mm	429 mm	48 mm	597 mm	178 mm	1113 mm	675 mm
Field of View close end (Y)	186 mm	186 mm	232 mm	419 mm	372 mm	932 mm	652 mm	1398 mm
Field of View far end (Y)	253 mm	379 mm	633 mm	464 mm	928 mm	1098 mm	1688 mm	2028 mm
Radial / Polar Resolution	0.03 mm	0.05 mm	0.2 mm	0.05 mm	0.3 mm	0.2 mm	0.8 mm	0.7 mm
Radial / Polar Reproducibility	± 0.03 mm	± 0.05 mm	± 0.2 mm	± 0.05 mm	± 0.3 mm	± 0.2 mm	± 0.8 mm	± 0.7 mm
Radial / Polar Linearity	± 0.10 mm	± 0.20 mm	± 0.4 mm	± 0.10 mm	± 0.5 mm	± 0.5 mm	± 1.6 mm	± 1.4 mm
Size of spot	Ø 0.5 mm	Ø 0.5 mm	Ø 1 mm	Ø 1 mm	Ø 1.5 mm	Ø 1 mm	Ø 2 mm	Ø 2 mm
Laser protection class Red Laser	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2
Laser class HT (1000 C°) Red Laser	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2
Laser class VHT (1300 C°) Red Laser	IEC 3R	IEC 3R	IEC 3	IEC 3B	IEC 3B	IEC 3B	IEC 3B	IEC 3B
Laser class VVHT (1500 C°) Blue Laser	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2	IEC 2
Laser class VVHT (→2200 C°) Blue Laser	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B	IEC 3R or 3B

Static measurement on white paper at measuring/sampling frequency, without any averaging of the serial output signal.

### Common Measurement Data:

Updating frequency	2000 Hz or 6000 Hz
Scan rate (from one side to the other for 2 kHz model)	600 or 300 scans/min
Angular resolution at Minimum 10° scan arch (2 kHz)	<0.08° or <0.04°
Angular resolution at Maximum 50° scan arch (2 kHz)	<0.4° or <0.2°
Scan rate (from one side to the other for 6 kHz model)	1800, 900 or 450 scans/min
Angular resolution at Minimum 10° scan arch (6 kHz)	<0.08° or <0.04° or <0.02°
Angular resolution at Maximum 50° scan arch (6 kHz)	<0.4° or <0.2° or <0.1°
Temperature deviation	± 0.03 % FS/C°
Light source red or blue diode (nm)	Laser (650 or 405)

### Electrical Data:

Serial out: 2 kHz / 6 kHz	RS232 or RS422 or Ethernet
Baud rate: 2 kHz / 6 kHz	115200 / 230400
Supply voltage	22 - 28 VDC
Power consumption	max 12 W

### Environment Data:

Operating temperature	0 - +45°C
Storage temperature	-20 - +70°C
Humidity non condensing	Max 90 % RH
Degree of protection	IEC IP65

### Physical Data:

Dimensions	310 X 190 X 64 mm
Weight	4.5 kg
Housing	Aluminum & Glass
Cable	2 m (5 & 10 m optional)

*More information on back page >*

Columbusvej 3 • DK-2860 Søborg - Denmark • Tel: +45 39 66 71 44 • VAT no. DK 19038432 • www.sensor.dk - E-mail: dse@sensor.dk


April 2021; Subject to change without notice.

## General Description

The O2DS Z scanner is an optical measuring device for non-contact precision measurement in two dimensions. The measurement is performed by oscillating the triangulation plane over  $X^\circ$  up to  $50^\circ$ . A fine collimated or focused laser beam is diffusely reflected from the surface of almost any kind of material or fluid, and a CCD-camera records the image through an objective. This makes it possible for a Digital Signal Processor to calculate the (radial) distance from the centre of the mirror axis to the object surface, as well as keeping track of the angular reference position.

The O2DS measuring system is a compact unit where optics, CCD-camera, and digital signal processing electronics all are integrated in the sensor housing. The schematic drawing to the right shows the scanner seen from the side. It is here indicated, with this orientation of the scanner, how the triangulation plane can sweep from minus  $25^\circ$  below the horizontal plane to plus  $25^\circ$  above the horizontal plane. The measured distance data is available with a measuring frequency of 2 or 6 kHz as a digital signal for an application running under Windows and using the O2DS driver DLL.

The scanner is delivered with CD's containing the mentioned DLL and a Windows test/demo program. The PC application program receives output data from the scanner over the RS422/RS232 serial interface (or Ethernet) and a COM port via the DLL. The software either converts polar coordinates of a measurement point to orthogonal X, Y-coordinates or presents a profile (table of X, Y-values) for each sweep from one side to the other. Within the application program the user can specify the seize of the Y-increment and thus the length of the output table containing the profile data.

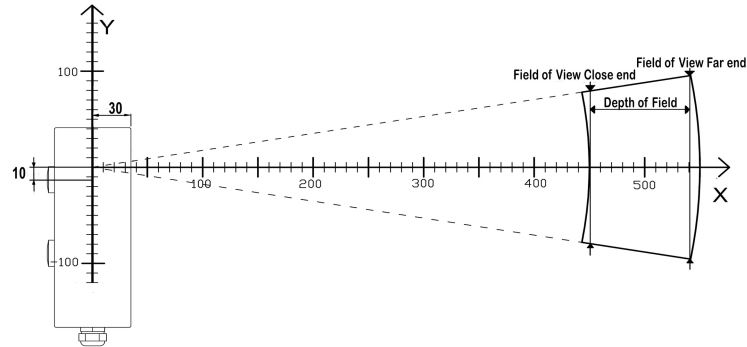

Standard Models of the O2DS scanner can be delivered in 8 different measuring ranges, and each in two versions with different measuring angles, either  $10^\circ$  or  $50^\circ$  and then in 2 or 3 scan rates giving high or low angular resolution, and can furthermore be customized to other than standard scan angles and measuring ranges.

## Multi O2DS applications

The O2DS scanners are also available in a synchronized version, where the units are programmed to operate as either a SLAVE unit or as a MASTER unit controlling one or more SLAVE units.

## High Target Temperature

The O2DS scanners are also available in high target temperature and high Laser light intensity versions named HT, VHT and VVHT. The HT version is made for surface temperatures up to  $1000^\circ\text{C}$ . The VHT can handle surface temperatures up to  $1300^\circ\text{C}$ . The VVHT, using a **BLUE** laser diode, brings target temperature up to as high as  $2.200^\circ\text{C}$ .

## Dimensions

